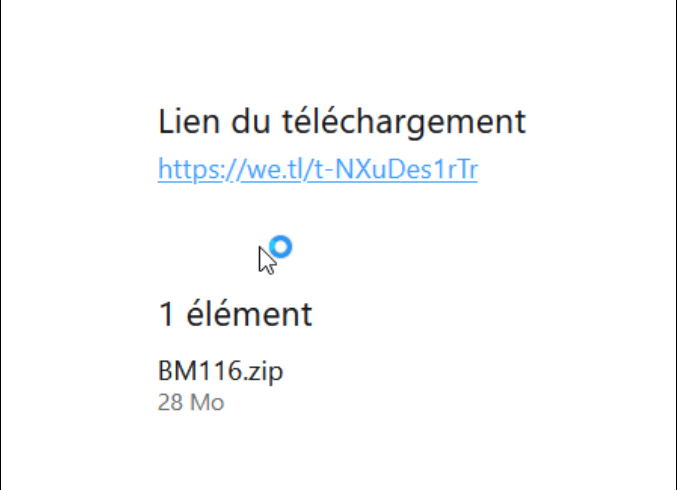

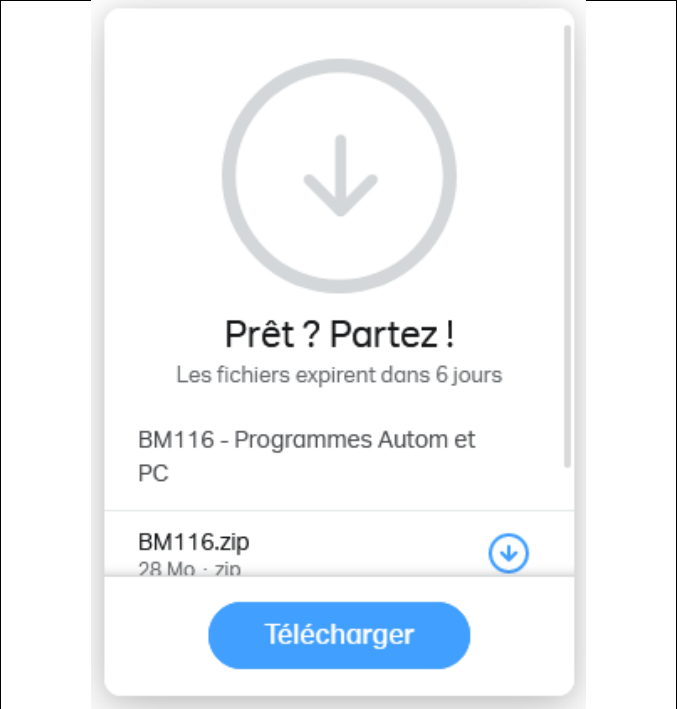


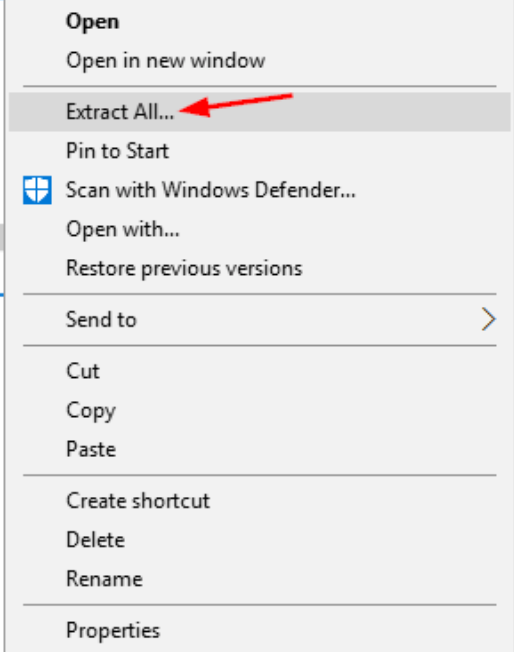

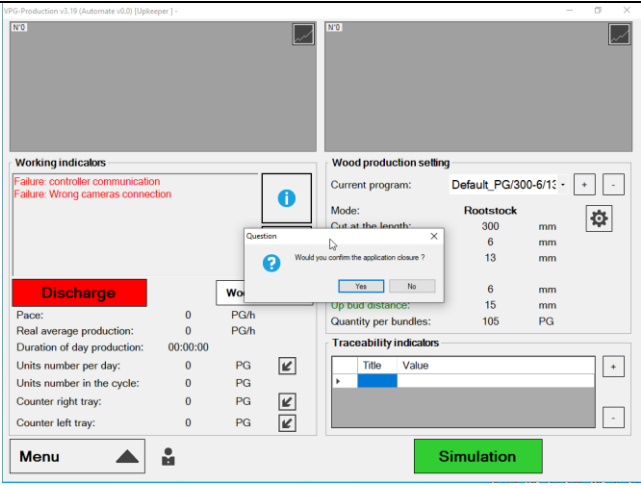


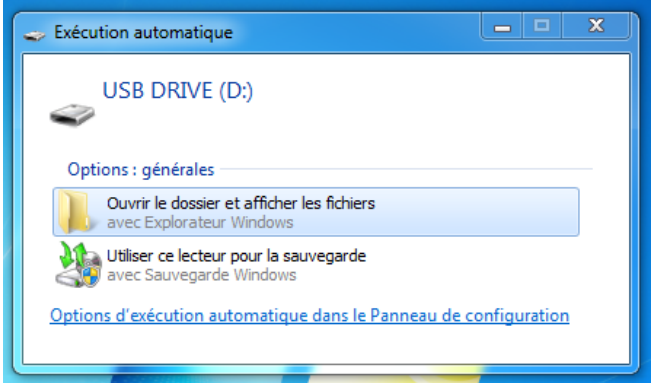
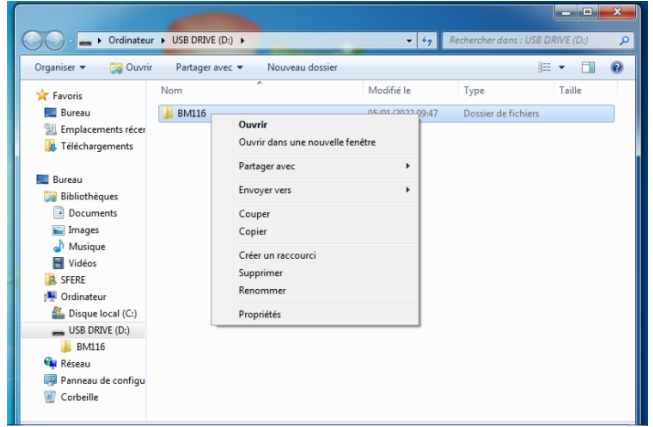


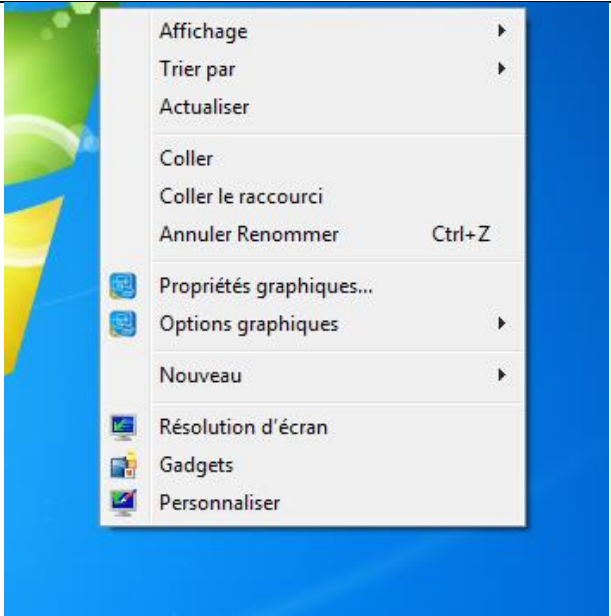
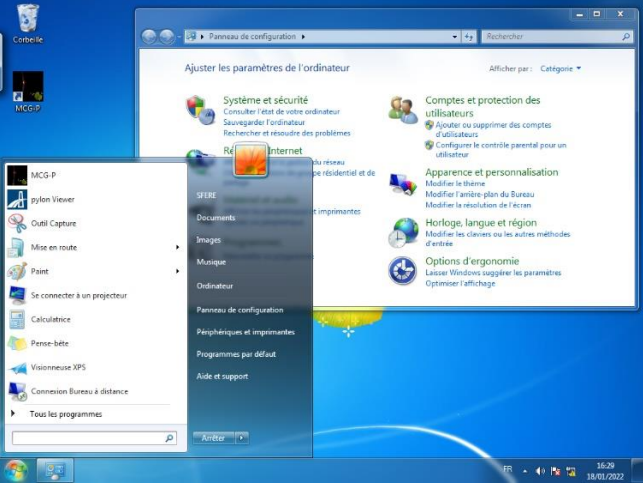

## Upgrade BM76S system with last version of the computer software and controller program.

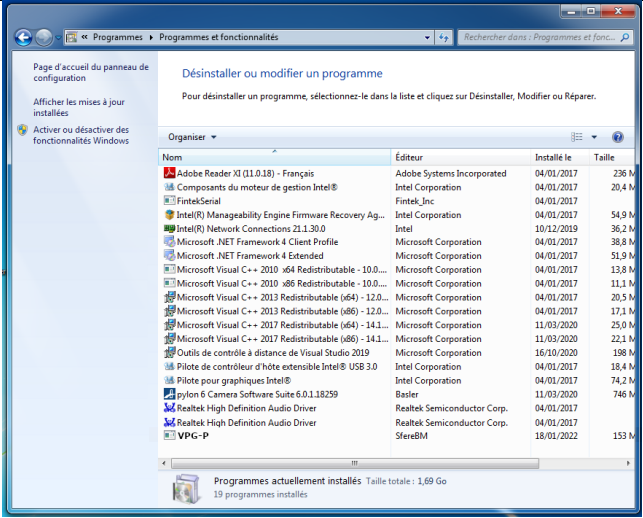
Thank you in following step-by-step the procedure described below.

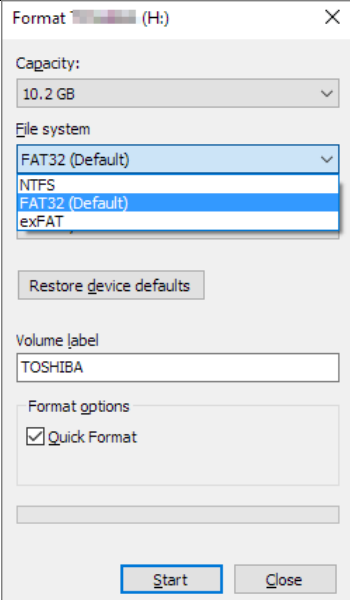
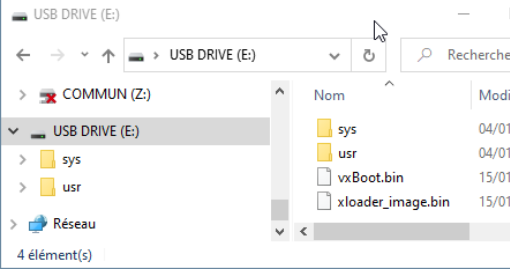

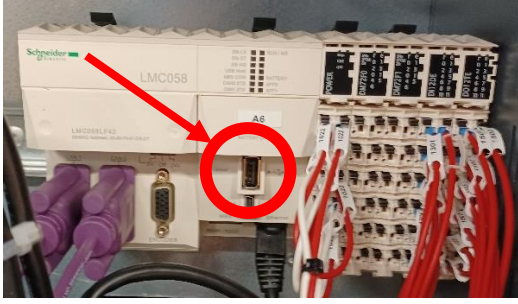
<b>1</b>	<b>On a PC connected to internet</b>
1.1	<p>Click on the link sent by email to reach the download page in the <b>WeTransfer</b> website</p>  <p>Lien du téléchargement <a href="https://we.tl/t-NXuDes1rTr">https://we.tl/t-NXuDes1rTr</a></p> <p></p> <p>1 élément</p> <p>BM116.zip 28 Mo</p>
1.2	<p>In WeTransfer website, press the « Download » button in order to save the <b>BM76S</b> package on your computer</p>  <p></p> <p><b>Prêt ? Partez !</b></p> <p>Les fichiers expirent dans 6 jours</p> <p>BM116 - Programmes Autom et PC</p> <p>BM116.zip 28 Mo - zip </p> <p><b>Télécharger</b></p>




<p>1.3</p>	<p>Extract the ZIP archive into <b>BM76S</b> directory and copy/paste this folder in a memory stick</p> <ul style="list-style-type: none"> <li>- Right click on the ZIP file to open the contextual menu</li> <li>- Click on Extract All... to realize the unzip operation</li> </ul>	
<p>2</p>	<p><b>On the BM76S</b></p>	
<p>2.1</p>	<p>Switch on the machine :</p> <ol style="list-style-type: none"> <li>1 - Turn the red main switch,</li> <li>2 - Turn the « EN » button</li> </ol>	
<p>2.2</p>	<p>Close VPG-P (enter the maintenance code 505)</p>	

2.3	<p>Open the door located to the left side</p>	
2.4	<p>Plug the memory stick in the computer and start Windows Explorer :</p> <ul style="list-style-type: none"> <li>- Slide your finder in the left side of the touch screen to show the keyboard</li> <li>- Double-click on the Windows key to open the « Start » menu</li> </ul>	
2.5	<p>Navigate through the USB drive</p>	
2.6	<p>Copy/Paste the <b>BM76S</b> folder from the memory stick to the desktop of the computer :</p> <ul style="list-style-type: none"> <li>- Right click (long press until circle appears) on the <b>BM76S</b> directory</li> <li>- A contextual menu is displayed, click on copy (<i>Copier</i>)</li> </ul>	

	<p>- Right click on the desktop to display a contextual menu, click on paste (<i>Coller</i>)</p>	
<p><b>3</b></p>	<p><b>MCG-P Software Update</b></p>	
<p><b>3.1</b></p>	<p>Open the « Start » menu, click on « control panel » (<i>Panneau de configuration</i>)</p>	
<p><b>3.2</b></p>	<p>Click on « uninstall a program » (<i>Désinstaller un programme</i>)</p>	

3.3	Find « MCG-P » in the list of the installed programs, click on uninstall ( <i>Désinstaller</i> ) and follow the instructions to uninstall the program	 <p>The screenshot shows the Windows 'Programmes et fonctionnalités' (Programs and Features) control panel window. The window title is 'Programmes et fonctionnalités' and the address bar shows 'Rechercher dans : Programmes et fonc...'. The main content area displays a table of installed programs with columns for 'Nom', 'Éditeur', 'Installé le', and 'Taille'. The program 'VPG-P' is highlighted in blue at the bottom of the list. The status bar at the bottom indicates 'Programmes actuellement installés Taille totale : 1,69 Go' and '19 programmes installés'.</p>
3.4	Run installation setup located on the desktop at <b>BM76S/PC/BM76S_MCG_X_Y.msi</b>	
3.5	Follow the instructions by accepting the default configuration to install the software	
<p>N.B. You can backup this setup program by pasting it on the desktop and put the previous version of the setup in the trash</p>		
4	<b>Controller Update</b>	

<p>4.1</p>	<p>Format the memory stick :</p> <ul style="list-style-type: none"> <li>- Open Windows Explorer</li> <li>- Right click (long press until circle appears) on the USB drive</li> <li>- Choose « Format... » in the menu</li> <li>- Let « FAT32 » by default for the file system</li> <li>- Click on « Start »</li> <li>- Wait for the format operation is completed</li> </ul>	
<p>4.2</p>	<p>Copy/Paste the content of <b>BM76/Automate/BM76_autom_01_03</b> pour injection via clef USB to the root of the memory stick (2 files and 2 folders) :</p> <ul style="list-style-type: none"> <li>- /sys</li> <li>- /usr</li> <li>- Vxboot.bin</li> <li>- Xloader_image.bin</li> </ul>	
<p>4.3</p>	<p>Switch off the machine thanks to the « EN » button located on the side of the machine</p>	
<p>4.4</p>	<p>Unplug the memory stick from the computer and plug it on the controller located behind the computer. The unique USB port is on the front of the controller</p>	

4.5	Turn on the « EN » button to start the machine	
4.6	The lights on the front of the controller are blinking green-red. The process may take a few minutes.	
4.7	<p>After few minutes, once the light « USB Host » turns on green, you can re-start again the machine :</p> <ul style="list-style-type: none"> <li>- Turn off the « EN » button,</li> <li>- Wait for the complete stop of the machine (few seconds)</li> <li>- Unplug the memory stick from the controller</li> <li>- Turn on the « EN » button.</li> </ul>	
4.8	You can finally remove the <b>BM76S</b> directory from the desktop (by drag and drop the folder on the trash icon)	